

- 1) Cement ENGINE TOPS "A" and "B" and ENGINE BOTTOMS "A" and "B" together.
- 2) Cement TOP and BOTTOM engine assemblies and glue onto rear of SURFBOARD.
- 3) Cement SHIFTER to back side of ENGINE TOP. Check to make sure shift ball fits the standing surfer's right hand. Cement JETS to back side of ENGINE BOTTOM.
- 4) Put FRONT and REAR WHEEL assemblies together by cementing the axles to the inside of the FRONT and REAR WHEELS. You may wanna peg 'em in w/a pin for more strength too. Cement wheel assemblies to bottom of surfboard.
- 6) Assemble the SIGN TOP, POST and BASE...

Yer **SIDEWALK SURFER** should look somethin' like tha picture on tha front cover. Ya may wanna fasten the Surfer to his board for final display.

Now stick a fork in yerself, coz... **BABY, YOU ARE DONE!**

Visit us on tha web... www.textfxgk.com

TexFX presents... Ed "Big Daddy" Roth's

SIDEWALK SURFER Resin Kit!




SCULPT BY GEOFF "TEX" GREENE




ATTENTION MAD MODELERS: Better paint this model before full assembly. I suggest puttin' basic stuff together - like the HAIR, LEGS n' FEET, ARMS n' HANDS - then painting.. otherwise it crazy hard to paint! This is a 100% resin kit so ya need cynoacrylate glue (like Superglue or Crazy Glue).

Ya may wanna seal the seams w/putty, too. Enjoy!

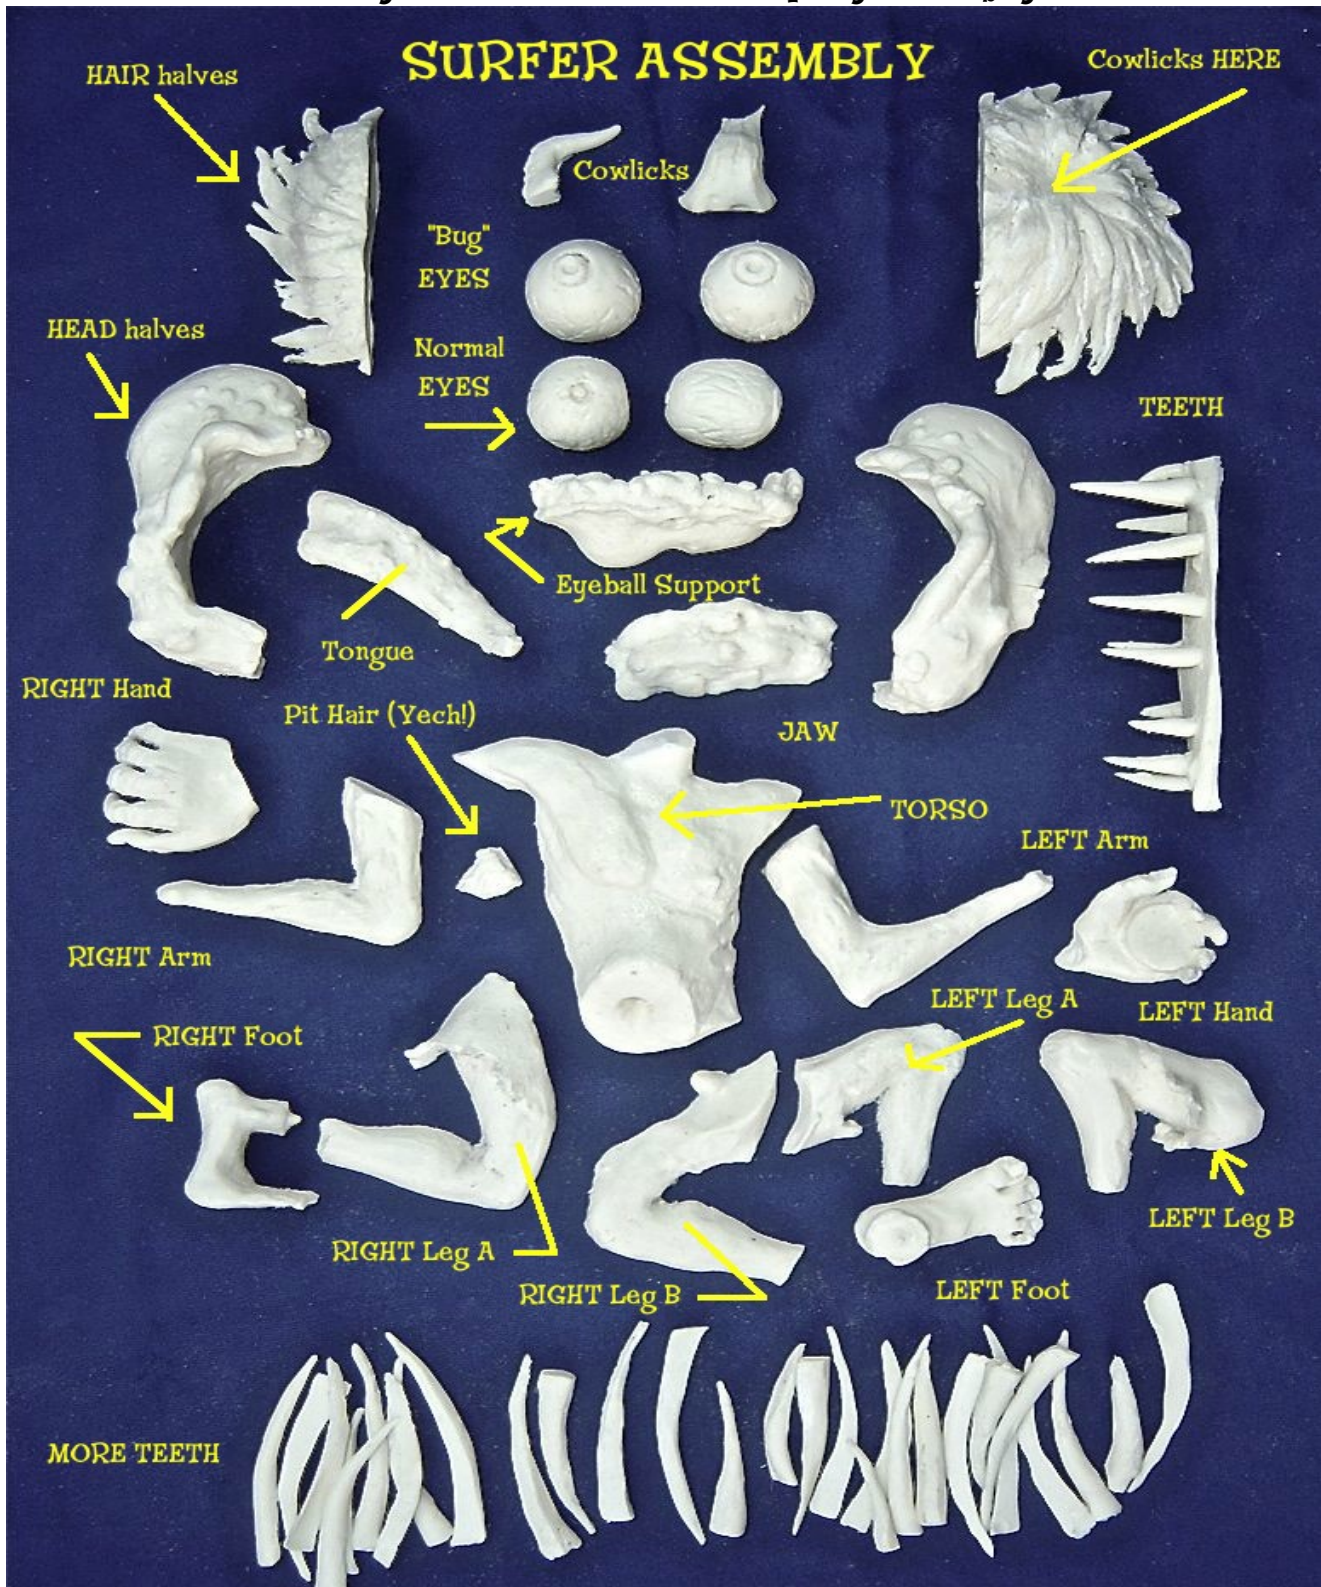

- 1) Cement HAIR halves, RIGHT & LEFT LEG halves and MORE TEETH halves together.
- 2) Put EYEBALLS into EYEBALL SUPPORT. ("Bugeyes" or "Normal" - yer choice)

3) **Fit EYEBALL SUPPORT** into **HEAD** an' cement **HEAD HALVES** together.

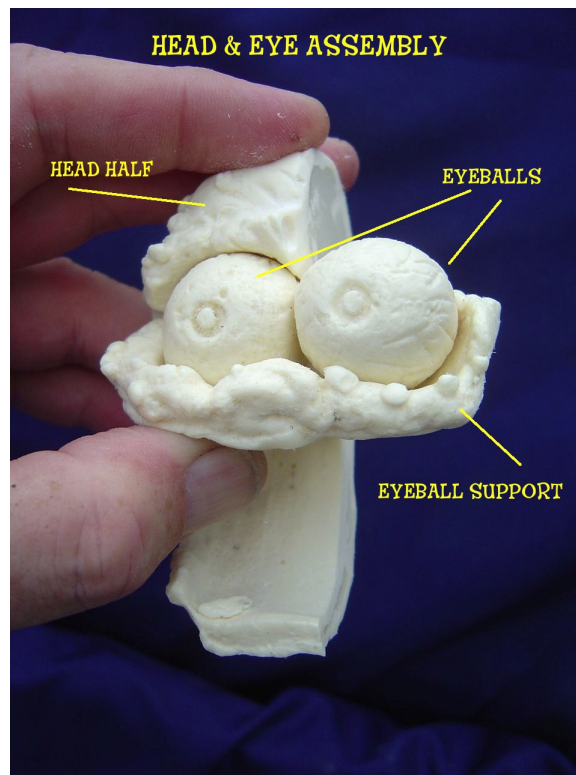

- 4) **Cement HANDS** to **ARMS** and **LEGS** to **FEET**. **Cement ARMS** and **LEGS** onto **TORSO** (**RIGHT** Leg fits in slot and **LEFT** Leg into hip cradle - adjust 'til they match up)
- 5) **Cement HEAD** assembly onto **TORSO** neck. **Cement HAIR** assembly onto **HEAD** assembly. **Cement PIT HAIR** (Yech!) into armpit and **COWLICKS** onto **HAIR** assembly.

Okay, now the **TEETH**... **PLEEZ NOTE** that "**MORE TEETH**" (the big teeth pieces) should be cut to fit the mouth! One of the big teeth should be cut and fitted to the top and bottom of the **TONGUE** so it looks like it's stickin' thru - there's holes to show where the pieces go. Some should be cut and the tops fitted into the bottom of the **EYEBALL SUPPORT** and the bottoms fitted into the **LOWER LIP** of the head assembly. There are **GUIDE HOLES** to show where the teeth should go! An' **BTW**, there are extra teeth - ya don't hafta use 'em all unless ya want!

- 6) **CUT** and adjust **TEETH** and **MORE TEETH** to fit the tooth spaces which are located along the underside of the **EYEBALL SUPPORT** and under the lower lip of the **JAW** to match the picture.
- 7) **Cement TONGUE** into mouth - the flat part of the tongue fits onto the roof of the mouth.

Seal all seams and sand smooth. Guess what? Yer finished w/the hard part! Now, on to...