



- 1) Cement ENGINE TOPS "A" and "B" and ENGINE BOTTOMS "A" and "B" together.
- 2) Cement TOP and BOTTOM engine assemblies and glue onto rear of SURFBOARD.
- 3) Cement SHIFTER to back side of ENGINE TOP. Check to make sure shift ball fits the standing surfer's right hand. Cement JETS to back side of ENGINE BOTTOM.
- 4) Put FRONT and REAR WHEEL assemblies together by cementing the axles to the inside of the FRONT and REAR WHEELS. You may wanna peg 'em in w/a pin for more strength too. Cement wheel assemblies to bottom of surfboard.
- 6) Assemble the SIGN TOP, POST and BASE...

Yer **SIDEWALK SURFER** should look somethin' like tha picture on tha front cover. Ya may wanna fasten the Surfer to his board for final display.

Now stick a fork in yerself, coz... **BABY, YOU ARE DONE!**

Visit us on tha web... www.textfxgk.com

TexFX presents... Ed "Big Daddy" Roth's

SIDEWALK SURFER Resin Kit!




SCULPT BY GEOFF "TEX" GREENE




ATTENTION MAD MODELERS: Better paint this model before full assembly. I suggest puttin' basic stuff together - like the HAIR, LEGS n' FEET, ARMS n' HANDS - then painting.. otherwise it crazy hard to paint! This is a 100% resin kit so ya need cynoacrylate glue (like Superglue or Crazy Glue).

Ya may wanna seal the seams w/putty, too. Enjoy!

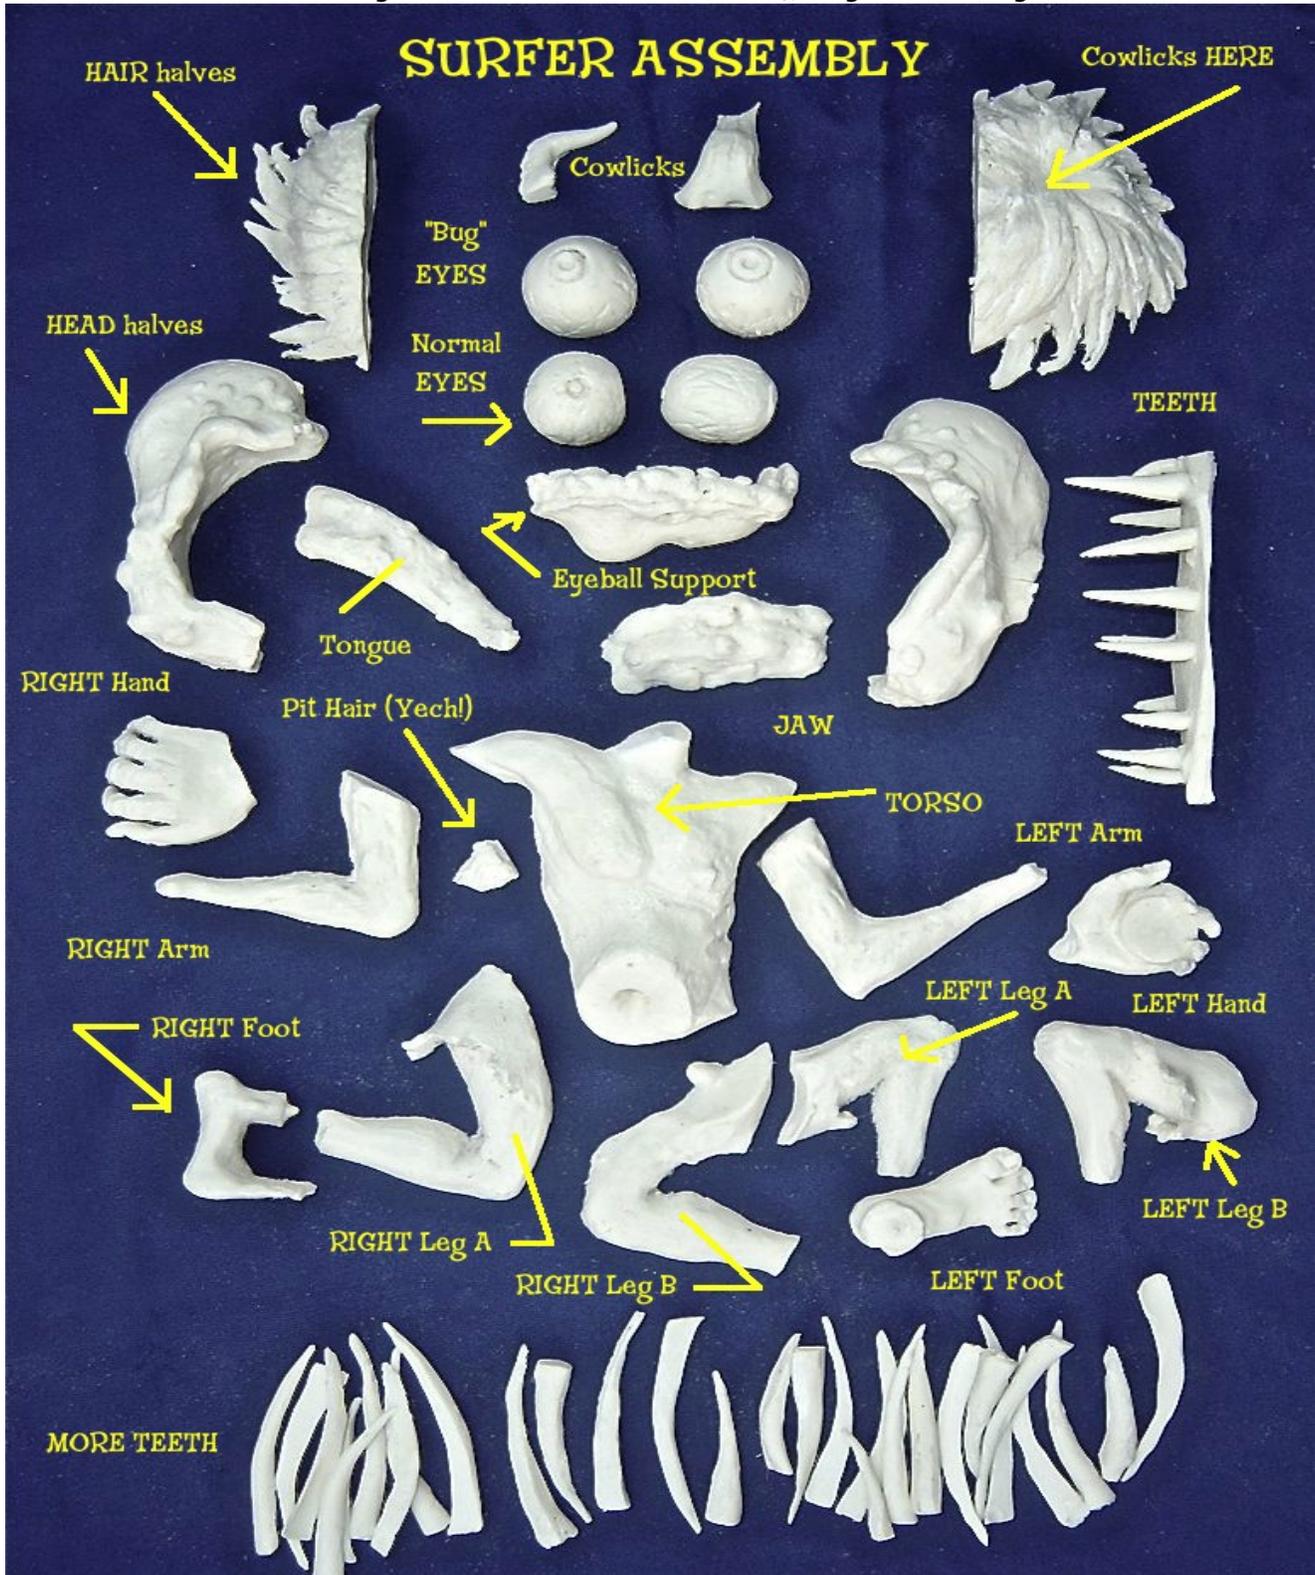

- 1) Cement HAIR halves, RIGHT & LEFT LEG halves and MORE TEETH halves together.
- 2) Put EYEBALLS into EYEBALL SUPPORT. ("Bugeyes" or "Normal" - yer choice)

3) **Fit EYEBALL SUPPORT** into **HEAD** an' cement **HEAD HALVES** together.

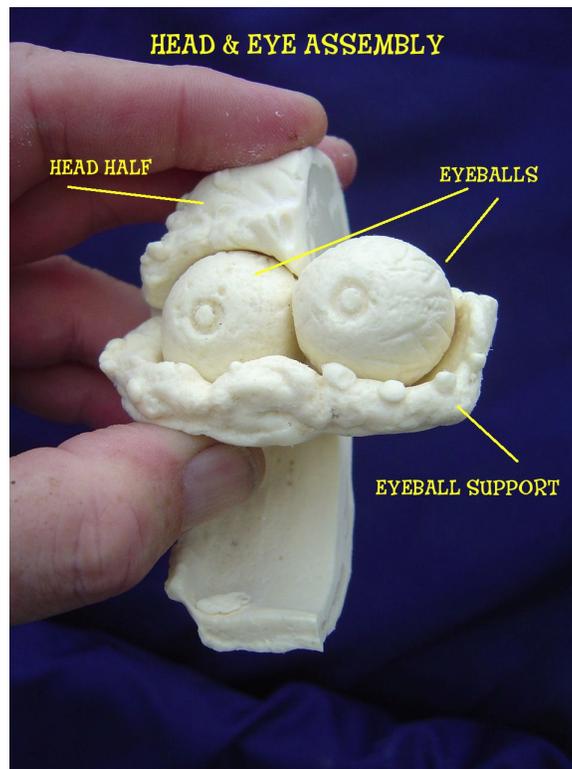

- 4) **Cement HANDS to ARMS and LEGS to FEET. Cement ARMS and LEGS onto TORSO** (RIGHT Leg fits in slot and LEFT Leg into hip cradle - adjust 'til they match up)
- 5) **Cement HEAD assembly onto TORSO neck. Cement HAIR assembly onto HEAD assembly. Cement PIT HAIR (Yech!) into armpit and COWLICKS onto HAIR assembly.**

Okay, now the **TEETH**... **PLEEZ NOTE** that "**MORE TEETH**" (the big teeth pieces) should be cut to fit the mouth! One of the big teeth should be cut and fitted to the top and bottom of the **TONGUE** so it looks like it's stickin' thru - there's holes to show where the pieces go. Some should be cut and the tops fitted into the bottom of the **EYEBALL SUPPORT** and the bottoms fitted into the **LOWER LIP** of the head assembly. There are **GUIDE HOLES** to show where the teeth should go! An' BTW, there are extra teeth - ya don't hafta use 'em all unless ya want!

- 6) **CUT and adjust TEETH and MORE TEETH to fit the tooth spaces which are located along the underside of the EYEBALL SUPPORT and under the lower lip of the JAW to match the picture.**
- 7) **Cement TONGUE into mouth - the flat part of the tongue fits onto the roof of the mouth.**

Seal all seams and sand smooth. Guess what? Yer finished w/the hard part! Now, on to...